
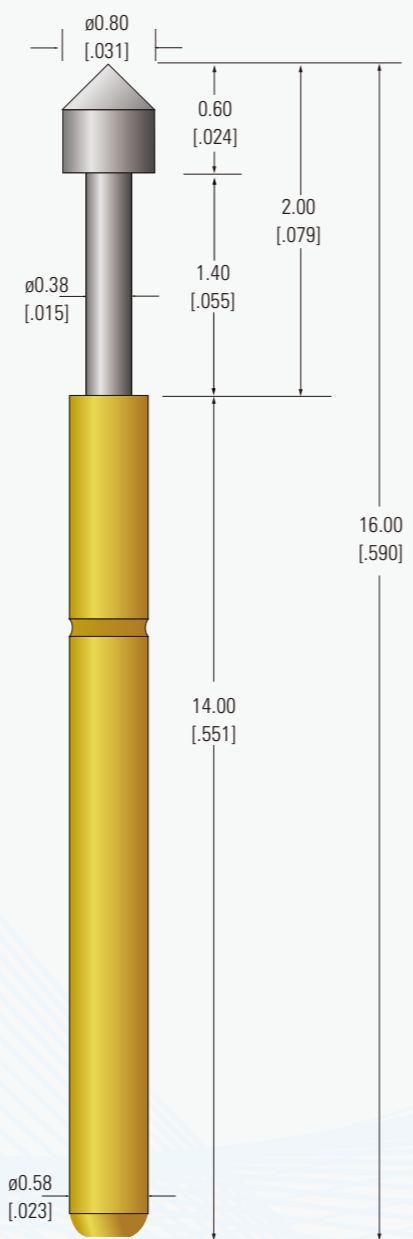


### Part Number:TOP20

1.00mm[0.039inch] test pitch


Probe Specifications	
Minimum Center:	1.00mm[0.039inch]
Full Stroke:	2.00mm[0.079inch]
Recommended Stroke:	1.33mm[0.052inch]
Spring Force:	80g[4.515oz]@2.54mm.
Impedance:	120milliohms
Current:	1Amp
Temperature:	-55°C to 120°C [-67°F to 248°F]
Spring Life:	500K cycles
Diameter Tolerance:	±0.01mm[±0.39mil]
Length Tolerance:	±0.10mm[±3.93mil]
Straightness Tolerance:	0.05mm[±1.97mil]

Materials Specifications	
Plunger:	BeCu or SK4, Rhodanizing
Spring:	Stainless Steel
Barrel:	Phosphor Copper, Au plating treatment

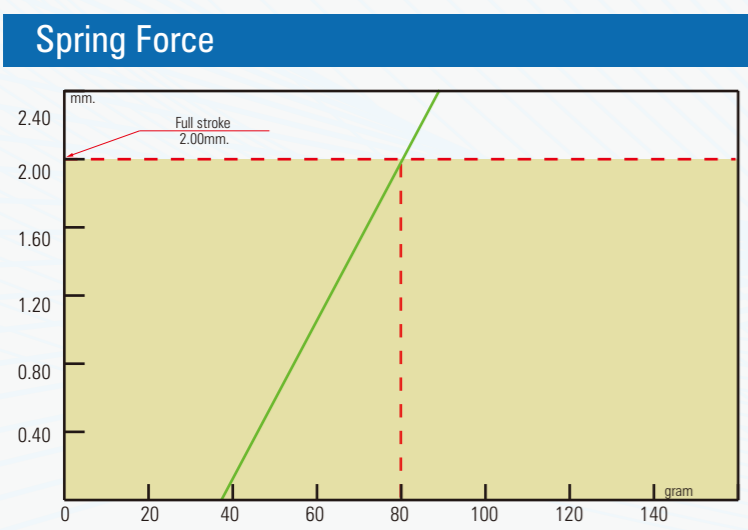


Probe mm.[inch]


### Receptacle mm.[inch]

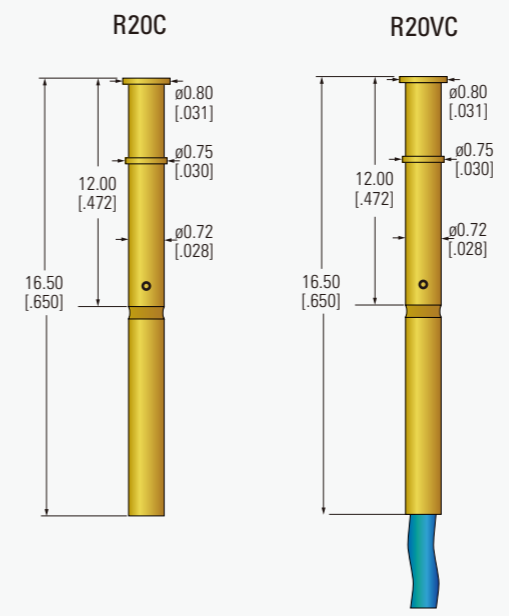

### Fixture Drilling Measurement

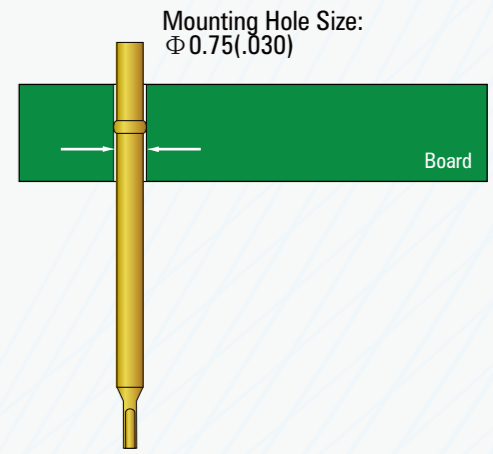

### Tip Style

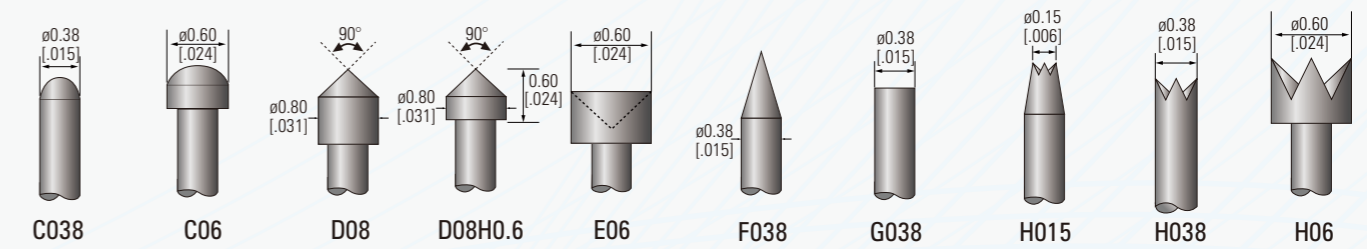

### How to order

TOP	20	D	08	80G
<b>Series Name</b> TOP=Normal ICT Probe CTOP=High Current Probe BP=Battery Probe FTOP=Frequency Probe ATOP=Automotive Probe SWTOP=Switch Probe	<b>Test Pitch Number</b> 20=PCB Test Probe Test pitch=1.00mm	<b>Head Style Code</b> D=Spear C=Round more...	<b>Head Diameter</b> 08=0.8mm=0.031inch	<b>Spring Force</b> 80G=80grams=0.8Newton