

Part Number:SWTOP3


3.50mm[0.138inch] test pitch

Probe Specifications

Minimum Center:	3.50mm[0.138inch]
Full Stroke:	5.10mm[0.201inch]
Recommended Stroke:	1.70mm[0.067inch]
Spring Force:	200g[7.054oz]
Impedance:	20milliohms
Current:	3Amp
Temperature:	-55°C to 120°C [-67°F to 248°F]
Spring Life:	1000K cycles
Diameter Tolerance:	±0.01mm[±0.39mil]
Length Tolerance:	±0.10mm[±3.93mil]
Straightness Tolerance:	0.05mm[±1.97mil]


Materials Specifications

Plunger:	SK-4, BeCu, Au plating treatment
Spring:	Music wire, Au plating treatment
Barrel:	Phosphor Copper, Au plating treatment

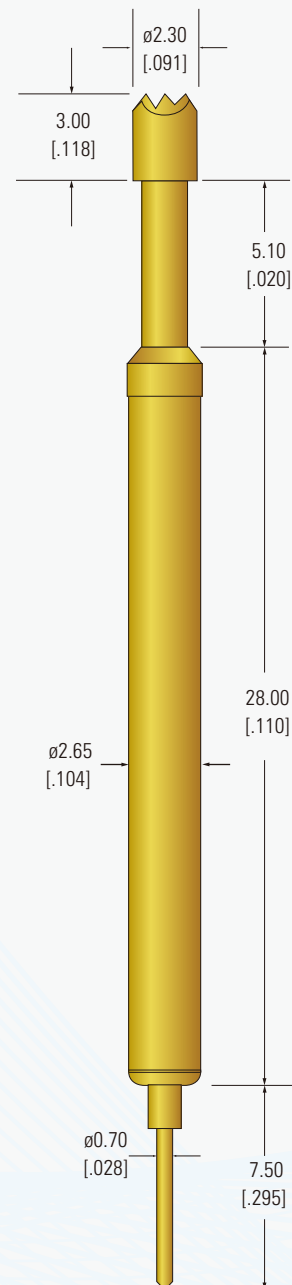


Probe mm.[inch]


Receptacle mm.[inch]

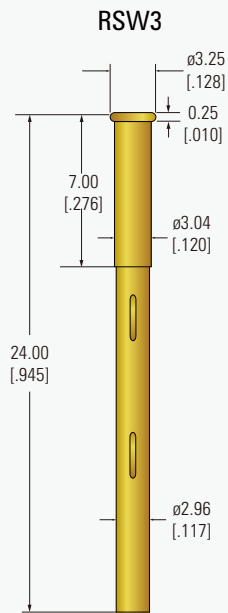

Fixture Drilling Measurement

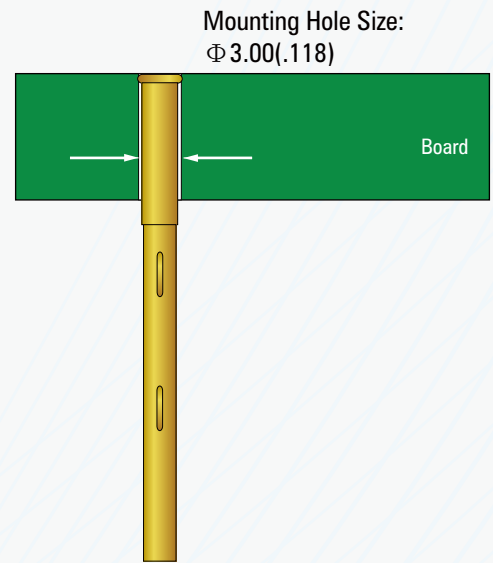

Tip Style

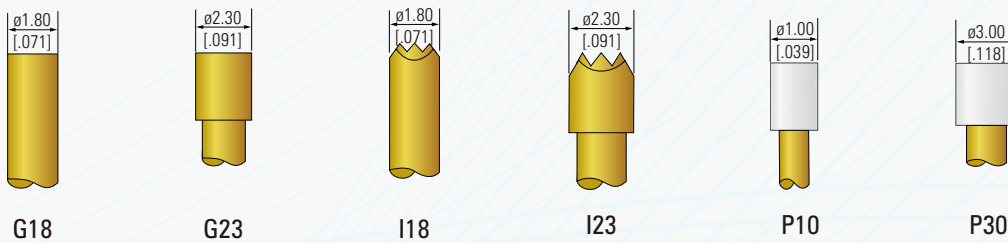

How to order

SWTOP	3	I	23	200G
Series Name TOP=Normal ICT Probe CTOP=High Current Probe BP=Battery Probe FTOP=Frequency Probe ATOP=Automotive Probe SWTOP=Switch Probe	Test Series SWTOP3=Switch probe	Head Style Code I=9 points crown more...	Head Diameter 23=2.30mm=0.091inch	Spring Force 200G=200grams=2Newton more...